

## How Do I Reconnect My Genie Garage Door To Wi-Fi?

1. Connect your smart device to the Wi-Fi network you want your opener to connect to.
2. Open your Aladdin Connect App.
3. Select your Garage Door.
4. There will be an error message and give you the option to troubleshoot. Choose **troubleshoot**.

5. Press and hold the blue button on your opener until it beeps, then release it. A few seconds later the LED should turn blue. This turns on the access point and creates a network for your smart device to connect to.




6. Choose **Continue**.

7. The app will try to connect to the opener.

8. Your smart device may ask your permission to connect to the network starting with **gdocntrl-**. If so, please allow it.

9. When it is completed, it will ask you what color the LED is now. If it's green then select green and your opener is now connected. If it is another color, the app will instruct you to repeat the above steps.

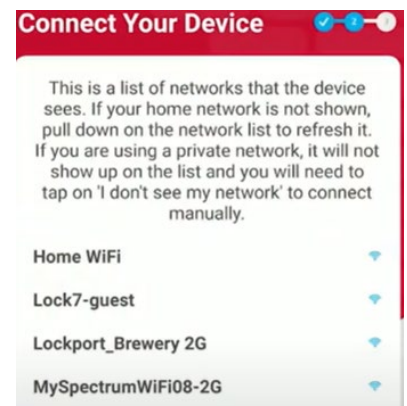

10. Finally, open and close the garage door by using the button on the wall or a remote. When this is complete, the opener will show **online** on your Alarm.com app and you will be able to control it through the app again.