


## How Do I Reconnect My LiftMaster Garage Door To Wi-Fi?

Complete the steps below to reconnect your LiftMaster MyQ Wi-Fi garage door opener to Wi-Fi:

1. **Put the garage door in learn mode.** Go to the push button on the wall, lift the plastic cover and you will see two buttons. Press the learn button. You will hear a single beep which means it has entered learn mode. Gently close the cover back so as not to open the garage door.



2. **Connect to the MyQ network.** On your mobile device go to your Wi-Fi  settings. Look for the Wi-Fi network that looks something like **MyQ-\*\*\***. Select it and wait for it to connect. It will show that it is an unsecured network, this is normal. You may have to select *Stay Connected*.

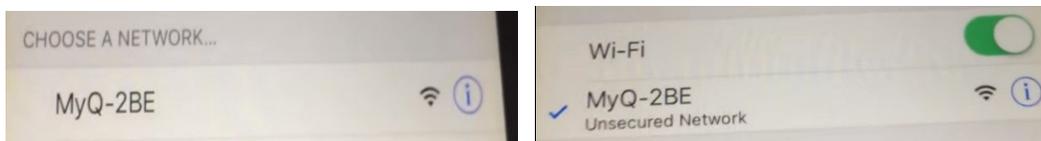

3. **Connect to the Garage Door.** Go to your internet browser, Safari or Chrome. Type “[setup.myqdevice.com](http://setup.myqdevice.com).” into the web browser’s address bar

4. **Erase the old Settings.** A setup page will come up. Choose the **Erase Wi-Fi Settings**. Then choose **Yes** that you are sure. Then choose **Exit**. This will disconnect you from the opener.

5. **Repeat steps 1-3.** Repeat steps 1 to 3 to connect to the opener again.

6. **Enter in the Wi-Fi information.** This time you will see a different setup page. Tap **Start** to begin. Select your Wi-Fi network. Enter your Wi-Fi password. Tap **Next**. The garage door will make a series of beeps. Once you hear three long beeps it will be successfully connected.

7. **Reset your Wi-Fi.** You are now done with the Wi-Fi connection to the garage door. Go to your WiFi settings on your mobile device and change it back to your regular Wi-Fi network.

8. **Update the garage door status.** Open and close the garage door from the push button on the wall. This will update the status on Alarm.com.

9. **Check Alarm.com.** Go to your app or website login to make sure it is functioning properly now.

