

How Do I Reconnect My Alarm.com Cameras to Wi-Fi?


There are two options to reconnect your Alarm.com cameras to Wi-Fi:

A. WPS Mode:

1. Press and hold the WPS button on your router until the LED starts flashing.




2. While the WPS button on the router is flashing, press and hold the WPS/Reset button on the camera until it starts flashing blue, about 3 seconds. If it's a doorbell camera, hold the doorbell button in until it starts flashing blue, about 30 seconds.

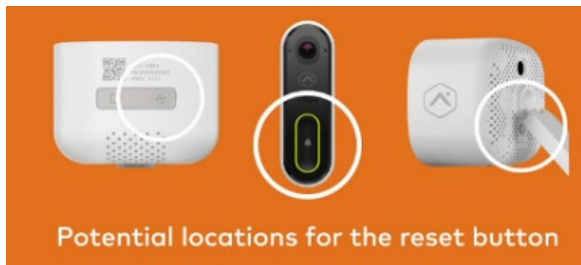

3. Wait for the LED to turn solid green, this may take up to 5 minutes.
4. Finally, check the Alarm.com app or website to verify the camera is working.

B. AP Mode:

1. Press and hold the WPS/Reset Button on the camera until it starts flashing white, for about 5 seconds. If it's a doorbell, hold the doorbell button in until it starts flashing white, for about 40 seconds.
2. Using a smartphone, tablet, or computer, connect to the Wi-Fi network name that starts with **ALARM** or **ADC**.

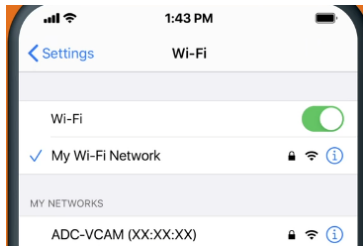

3. Open a web browser and enter 192.168.1.1 in the address bar then follow the onscreen instructions:
 - a. Tap **Scan for wireless networks**
 - b. Select the Wi-Fi network you want the camera to connect to.
 - c. In **Security Key**, enter your Wi-Fi password.
 - d. Tap **Save**.
 - e. Tap **OK**
4. Once the camera's LED turns a solid green, verify that you can see the camera on the Alarm.com app or website.